


# InLab<sup>®</sup> 738-ISM-5m

Cond °C ISM



For portable applications in the lab and outdoor.  
Ideal for standard and high conductivity samples.

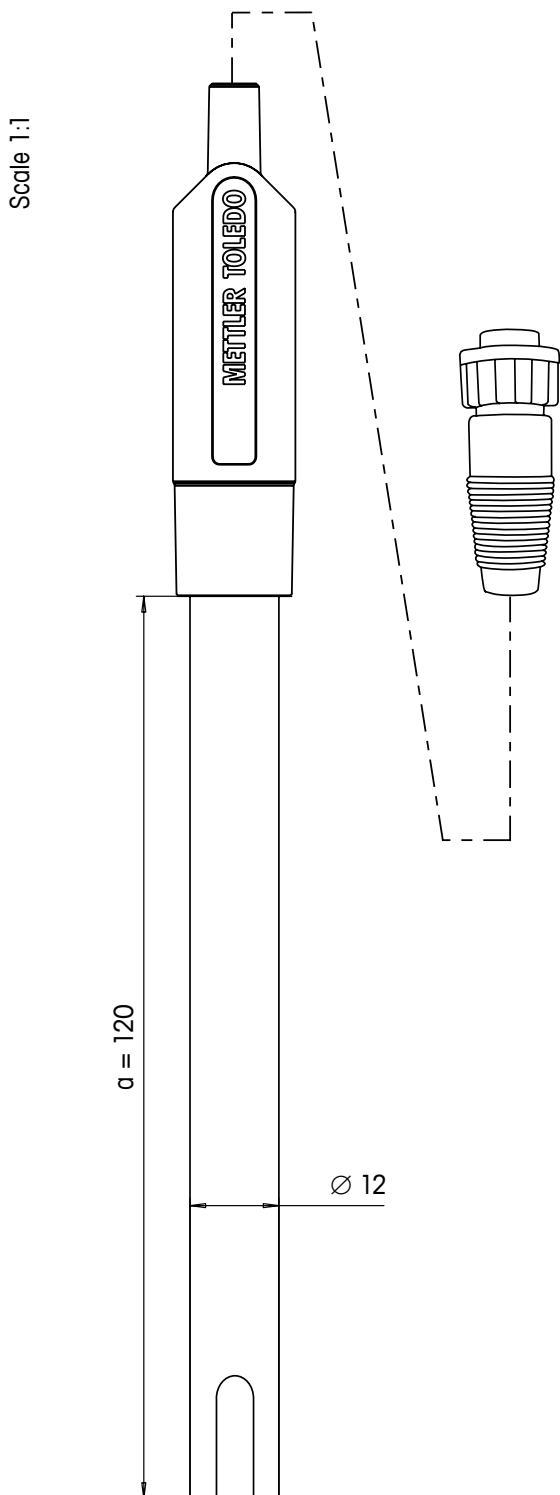

**Sensor type** conductivity cell

**Order number** 51344112

### Specifications

measuring range 0.01...1000 mS/cm  
zero point (pH) -

temperature range 0...100 °C  
temperature probe NTC 30 k $\Omega$

shaft material epoxy  
membrane glass -  
membrane resistance -

reference system -  
reference diaphragm -  
reference electrolyte -  
bridge electrolyte -

electrode head -  
cable length 5 m  
connector LTW (IP67)

cell constant (cm<sup>-1</sup>) 0.57  
cell type 4 graphite poles

indicating metal -

### Storage

dry